

## Pico On Plus



Xerafy's Pico On Plus tag is designed to fit small metallic assets while exceeding competitive read range performance thanks to our patented printed antenna technology.

The ceramic tag is ideally suited to harsh environments where its exceptional durability matches the life of assets in the field.



Fits small size



Powerful  
on-metal performance



Exceptional durability



Harsh environments



High temperatures



### Performance Characteristics

Read range (handheld) <sup>1</sup>	Up to 7 ft (2 m)
Read range (fixed) <sup>1</sup>	Up to 10 ft (3 m)
Polarization	Linear
Attachment	3M 9495 LE Adhesive


*1. Performance based on standard testing methodologies. Performance may vary depending on environmental factors and reader output power.*

### Functional Specifications

RF protocol	EPC global Class 1 Gen2
Frequency	902-928 (US) ; 865-868 (EU)
IC type (chip) <sup>1</sup>	Alien Higgs-3
Memory <sup>2</sup>	96-EPC bits, 64-bit unique TID, 512-bit user memory
Material	Ceramic

- The chip data retention is up to 50 years, based on chip operating under general environment conditions.*
- EPC and User Memory can be re-programmed, password protected, or permanently locked. TID is locked and unique at the point of manufacturing.*

### Radiation Pattern

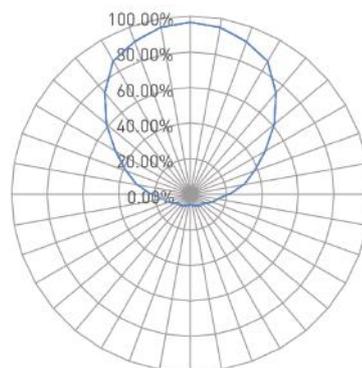

- Tool Tracking for MRO, Aerospace, Railways, Nuclear
- Data centers and IT assets
- Oil & Gas assets in the field
- Medical devices, Weapon Tracking

[LEARN MORE >](#)

## Environmental Specifications

Operational temperature	-30°C to +85°C
Survival temperature	-40°C to +150°C (long term)
Peak temperature	+200°C (60 min intervals / 500 cycles)
IP rating	IP68
Shock (drop)	3 ft (1 m) to concrete/ granite up to 200 cycles
Vibration	MIL-STD-810G

## Industry Compliance

RoHS	EU Directive 2011/65/EU
CE	Yes
ATEX/IECEX	Compliant
Warranty	1 year


## Order Information

X3110-US001-H3	Pico On Plus US
X3110-EU001-H3	Pico On Plus EU
Optional service	Encoding / Printing / Laser Etching




## Product Dimensions and Weight

Dimensions (in)	ø 0.5 x 0.28 x 0.12
Tolerance	+/- 0.004
Dimensions (mm)	12.8 x 7.08 x 3.08
Tolerance	+/- 0.1
Weight	0.05 oz (1.4 g)

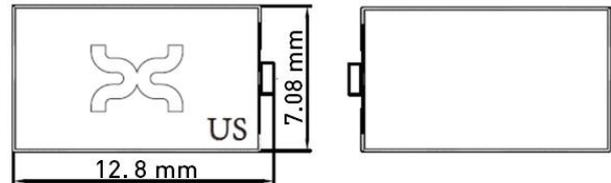

## Installation Instructions

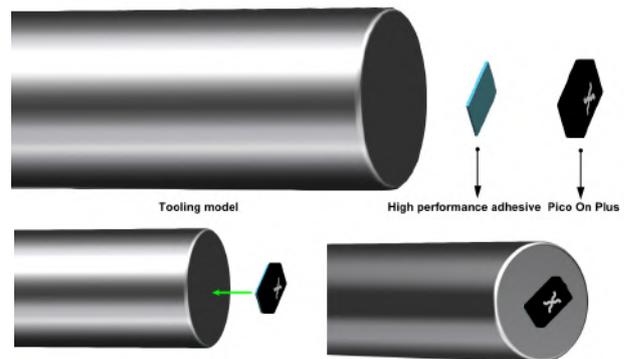

To obtain the maximum adhesion, the following steps should be taken:

1. Clean surface using Isopropyl alcohol, or equivalent solvent to ensure the surface is free of dirt, dust, oil, and other debris that may affect adhesion.
2. Peel adhesive liner from the back of the tag, ensuring the adhesive is not contacted.
3. Place tag in desired location and firmly apply even pressure for up to 30 seconds.
4. To ensure proper curing of adhesive, allow ample cure time of up to 12 hours before being handled.

### About Xerafy

Xerafy designs and manufactures the world's toughest RFID tags to power Industrial IoT applications in Aerospace, Oil & Gas, Automotive, Healthcare and Manufacturing.

For Product inquiries: [sales@xerafy.com](mailto:sales@xerafy.com)  
Singapore | China | US | UK

[GO TO WEBSITE >](#)