

Delta Metal Skin




Functional Specification:


RFID Protocol:	EPC Global Gen2, ISO/IEC18000-6C
Frequency:	902-928MHz(US),865-868MHz(EU)
IC type:	Impinj Monza R6-P
Memory:	EPC 128bits, USER 32bits,
Write Cycles:	100,000 Times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces
Read Range :(Fix Reader)	4.5 m, on metal
Read Range :(Handheld Reader)	2.5 m, on metal
Warranty:	1 Year

Physical Specification:


Size	80x20mm
Thickness:	1.0mm
Material:	White thermal transfer face stock
Mounting Methods:	High Performance Adhesive
Weight:	2.2g

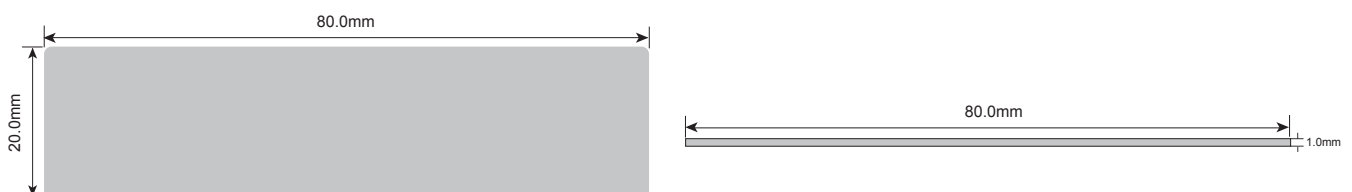

Read Range(US):

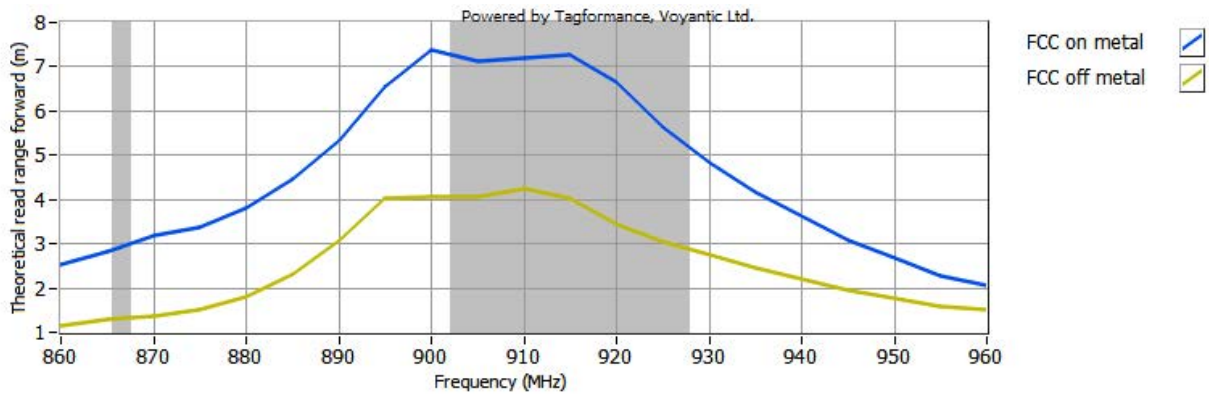

Read Range(EU):

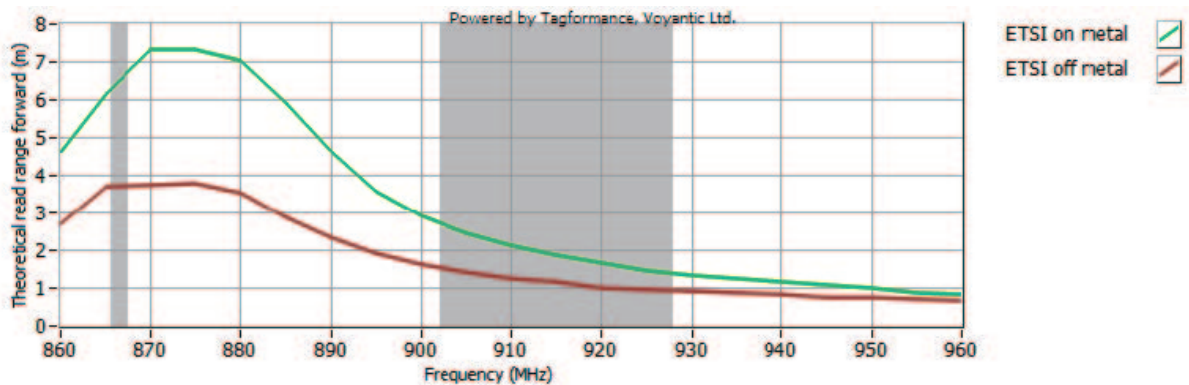

Environmental Specification:

IP Rating:	IP57
Storage Temperature:	-20°C to +85°C
Operation Temperature:	-20°C to +85°C
Certifications:	Reach Approved, RoHS Approved, CE Approved

Order Confirmation:

X8020-US100-R6P	Delta Metal Skin(US)
X8020-EU100-R6P	Delta Metal Skin(EU)

